

KomTrans RS232 Code Translator

Do you know the problem?

You simply want to replace a projector which is supervised by a media control system but you don't know how to program the existing media control system?



The easy way to solve your problem is the KOMTECH KomTrans RS232 Code Translator. KomTrans translates up to 32 commands of a device (for example projector, plasma, etc.) in a code of a new device. The commands are transformed similar to a dictionary. The interface is set up bidirectional so 32 commands can be sent from the new device back to the existing media control system.

If the new device can't send commands back, these can be produced simulated and send back automatically to the control unit. Every command can be up to 31 characters in ASCII or HEX format.

A simple to use software helps you to program KomTrans in short time. KomTrans is shipped with an external power supply and two RS232 cables. The compact dimension allows to use KomTrans in almost every space.



Example of use:

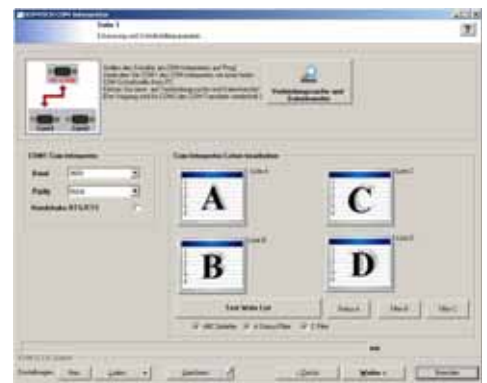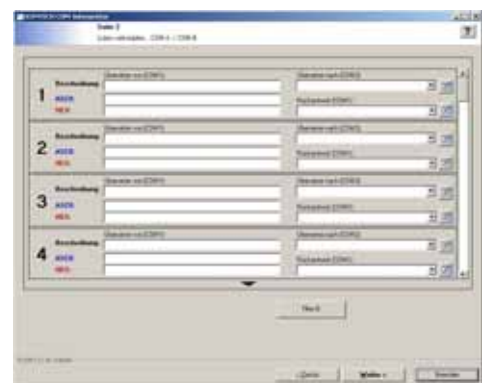

Technical Data

Dimensions (W x H x D)	94mm x 24mm x 56mm
Power supply	7-12V DC / 10mA
Operating temperature	5-45°C
Baudrata	4800, 9600, 19200, 38400 Baud
Parity	None, Odd, Even, Mark, Space
Format	8 Data-Bits, 1 Parity-Bit, 1 Stopp-Bit
Handshake	None, RTS/CTS
Command management	32 incoming commands per port 32 outgoing commands per port maximum 31 characters per command
Command syntax	ASCII and HEX

Included in delivery

- 230V power supply
- 2 x RS232 connecting cable
- Software CD

Type	Item No.
KomTrans RS-232 Code Translator	06000891